

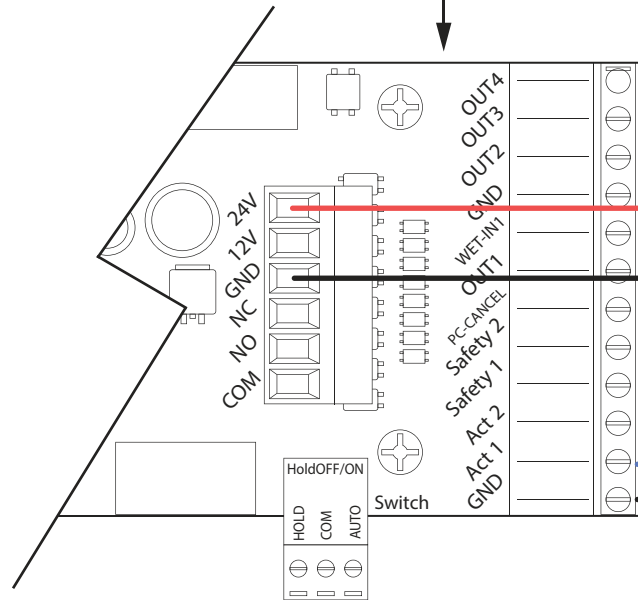
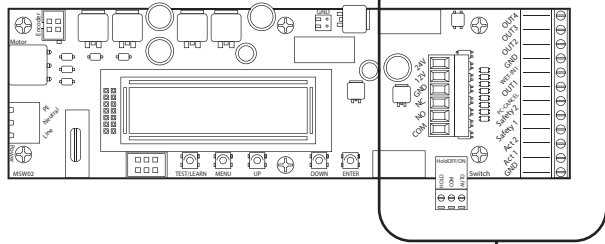


# MICOM SW800



# MTR RECEIVER

ANT  
CH1  
CH1  
CH2  
CH2  
V+  
GND

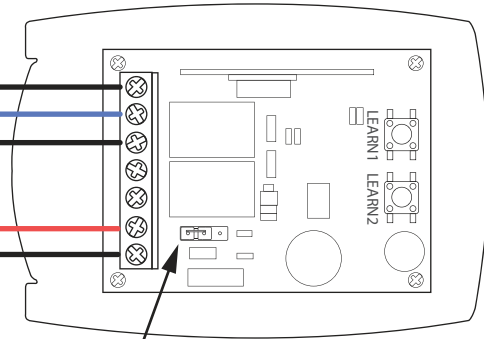

## INSTRUCTIONS

PUSH DESIRED CHANNEL LEARN BUTTON FOR 2 SECONDS.  
LED FLASHES.  
PUSH AND RELEASE THE DESIRED TRANSMITTER 3 TIMES.  
LED WILL STAY SOLID FOR 2 SECONDS.  
THE CHANNEL IS NOW PROGRAMMED.

TO ERASE THE CHANNEL, PUSH AND HOLD THE  
LEARN BUTTON FOR 10 SECONDS.

## CONNECTION SCHEDULE

MTR-01 (TERMINALS)		MICOM SW800 (TERMINALS)
ANT	ANTENNA	N/A
CH1	CHANNEL 1 SWITCH (NO)	ACT 1
CH1	CHANNEL 1 SWITCH (COMMON)	INPUT GND
CH2	CHANNEL 2 SWITCH (NO)	ACT 2 (IF NEEDED)
CH2	CHANNEL 2 SWITCH (COMMON)	INPUT GND (IF NEEDED)
V+	POWER INPUT (+) 12-24 VAC/DC	POWER 24V
GND	POWER INPUT (-) 12-24 VAC/DC	POWER GND

TITLE:

## MICOM MTR RECEIVER

PART NO:

SCALE:

VERSION:

NONE

DIAGRAM 17

DATE:

APRIL 2023

DRAWN BY:

SC/GDA

SHEET:

1 of 1